


KLA-D1212

Line Array

INKLINE
SERIES

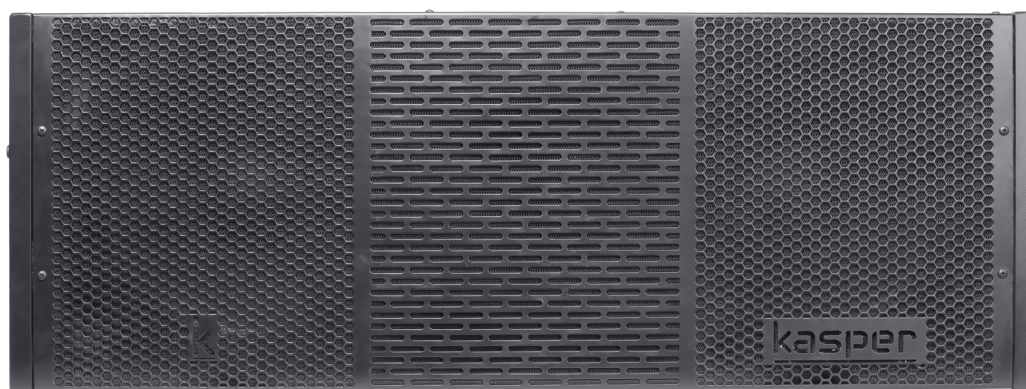

Compact Line Array Speakers for Installs to match with KUA Subwoofers & Klout speakers for sidefills and delays

KLA-D1212

Line Array

TECHNICAL DATA	
Speaker Type	Dual 12" + Compression Driver, Passive /Biamp
ACOUSTICAL DATA	
Frequency Response	60Hz - 20KHz
Impedance	LF at 4Ω / HF at 8Ω
Watts	1200 RMS Watts / 2400 Watts Peak Power
Max SPL	135 dB
HF	Dual 2" compression driver
Voice Coil	1"
Directivity	115° x 10°
LF	12" x 2
Voice Coil	4" neodymium driver
Crossover Point	1.2KHz
CONNECTIVITY	
Input	2 x NL4
MECHANICS	
Housing	Marine Ply, Polyurea Painted
Rigging Points	Integrated Rigging Hardware